


# Model ASC 300C Beacon Tracking Receiver

*Quality Products @ Reasonable Prices*

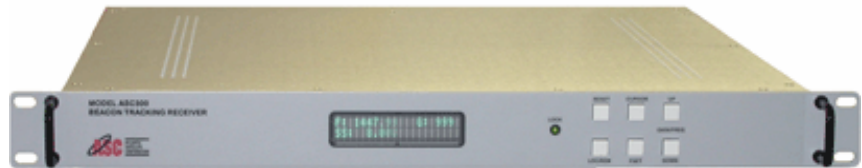

## Functional Description

The Model **ASC300C Beacon Tracking Receiver** is a high performance unit that is designed to real time track the power density of a satellite beacon and output a DC voltage that is linearly proportional to the beacon power by utilizing a true, RMS-responding power detector. The applications for the **ASC300C** are for antenna tracking controllers and uplink power control system. Note: The model ASC300C can be offered with external BDC instead of an internal BDC.

## Systems Specifications

Input Frequency ..... 3400.000 to 4200.000 MHz  
 ..... **Internal Block Converter**  
 Pre-detection Bandwidth ..... 15 kHz  
 Input Level..... - 80 dBm, min.; - 50 dBm max.  
 ..... For full tracking range capability  
 Frequency Tuning ..... 10 kHz Steps  
 Frequency Adjust ..... Front Panel or Remotely  
 AFC .....  $\pm 20$  kHz  
 Threshold .....  $<45$  dB-Hz (C/N<sub>0</sub>) for acquisition  
 Input Impedance ..... 50 Ohm  
 Input Connector..... Type-N, Female  
 Output Impedance..... 100 Ohm, single ended  
 Output Connector..... Terminal plug and  
 ..... BNC Female  
 Tracking Gradient.....0.5 V/dB, Std  
 Tracking Response ..... 0 to +10 VDC  
 ..... for a 20 dB input level change  
 System Level Adjust.....60 dB, 0.5 dB Steps  
 Frequency Stability.....  $<1$  ppm, 0° c to +50° c  
 Frequency Reference..... 10 MHz (Internal)  
 Phase Noise.....  $>75$  dB-Hz, 1 kHz from Carrier

Alarms ..... Unit Lock  
 Alarm Relay ..... Form-C  
 External Power..... None (Internal BDC)  
 Continuous Digital Streaming..(optional) See Below \*  
 DB9 interface connector..(optional) See Below \*  
 Front Panel Display..... Vacuum Fluorescent  
 M&C ..... RS-232 or RS-422/485 Switchable  
 ..... on rear panel  
 Ethernet 10/100 Base T (**Optional**)  
 M&C Connector..... DB-9, Female  
 ..... RJ-45 Connector

## Physical Characteristics

Size ..... 1.75"H X 16.00"D X 19.00"W  
 Weight..... 9 lb. (4.08 kg)  
 Primary Power..... 90 - 264 VAC 47 - 63Hz  
 ..... Auto-Sensing

## Environmental Specifications:

Operating Temperature ..... 0° c to +50° c  
 Storage Temperature ..... -40° c to +70° c  
 Humidity ..... 95% RH@ 40° c

## \* CDS Continuous Digital Streaming

The streaming option associated with the ASC300 series of beacon tracking receivers provides a continuous, two byte, data stream running at 9600 baud that contains twelve bits of signal strength level indication as well as lock or alarm condition of the unit. Other baud rates are available. A female DB9, interface connector on the rear of the unit is specifically dedicated for this option.

ATLANTIC SATELLITE CORPORATION

**200 Expressway Court  
Virginia Beach, Virginia 23462**

Phone: 757-318-3500  
 Fax: 757-318-7020  
 Email: sales@atlanticsat.com  
 www.atlanticsat.com